
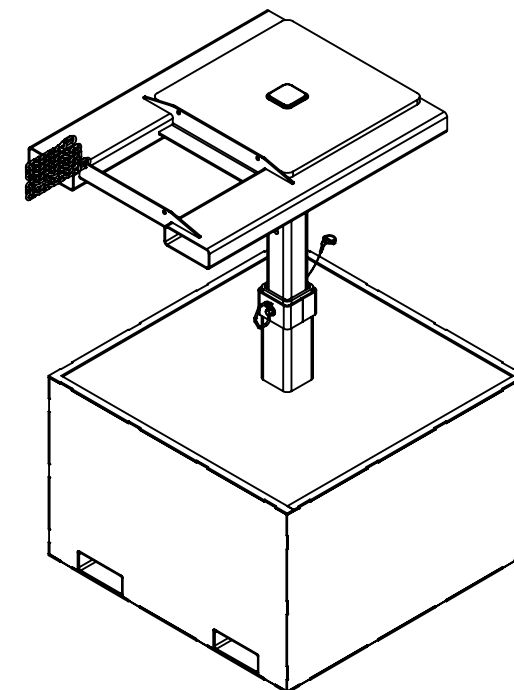


FORK MOUNTED TRASH BIN COMPACTOR - FWBC-4242-4-BC

APPROX WEIGHT: 4000 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

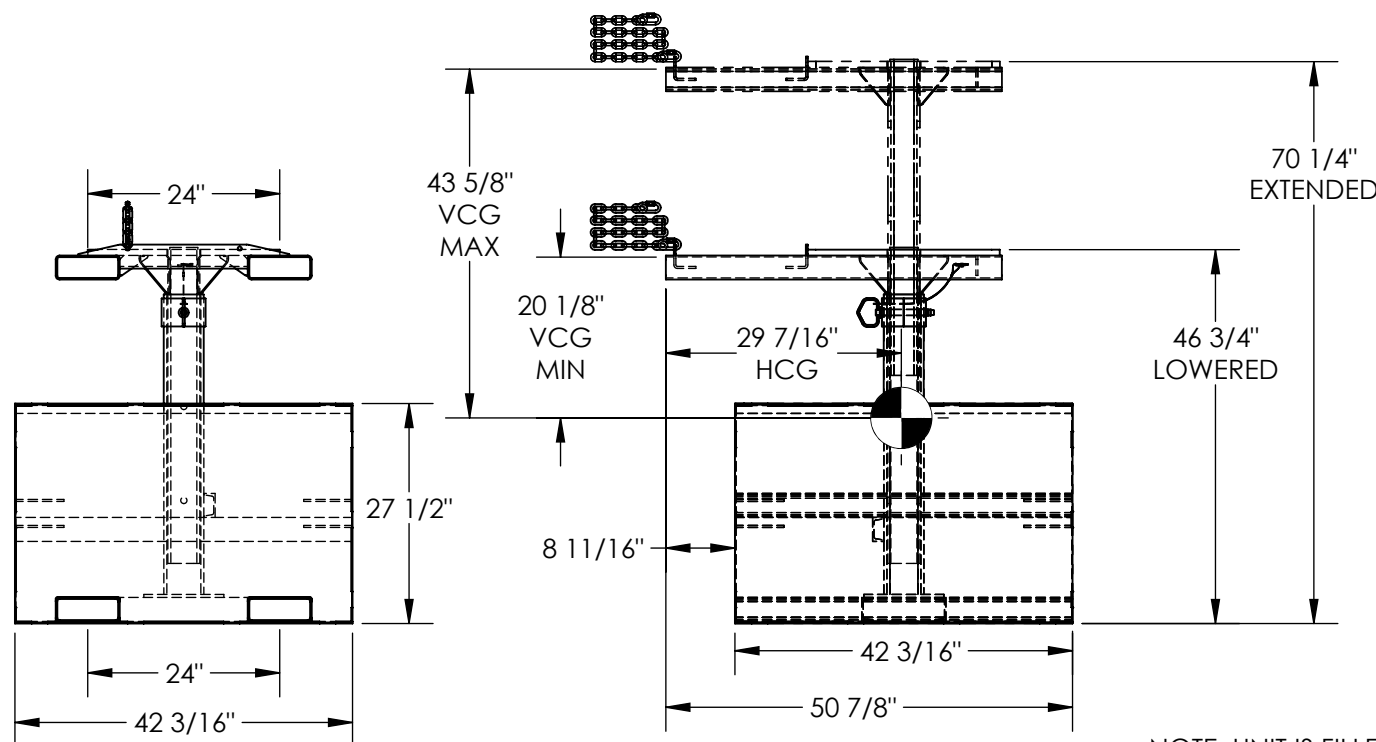

NOTE: UNIT IS FILLED WITH
GRAVEL OR LIMESTONE
AGGREGATE CONCRETE.

DIMENSION TOLERANCE $\pm \frac{1}{4}$ "

STANDARD FEATURES

MODEL NUMBER IS FWBC-4242-4-BC

OVERALL WIDTH IS $42 \frac{3}{16}$ "

OVERALL LENGTH IS $50 \frac{7}{8}$ "

EXTENDED HEIGHT IS $70 \frac{1}{4}$ "

LOWERED HEIGHT IS $46 \frac{3}{4}$ "

FORK POCKETS ARE $7 \frac{1}{2}$ " x $2 \frac{1}{2}$ "

USABLE ON 24" CENTERS

DURABLE LIQUID PAINT BLUE FINISH

BASE FILLED WITH CONCRETE

UNIT WEIGHT 4,000 LBS APPROX.

CENTER OF GRAVITY CALCULATED W/ WEIGHT

VERTICAL CENTER OF GRAVITY IS

$43 \frac{5}{8}$ " MAX AND $20 \frac{1}{8}$ " MIN

HORIZONTAL CENTER OF GRAVITY IS $29 \frac{7}{16}$ "

APPROX. WEIGHT / LOST LOAD = 4000 LBS.

MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"

NEVER EXCEED LOAD CENTER

RATING PER FORKTRUCK

MANUFACTURERS GUIDELINES.

DO NOT USE THIS FORK TRUCK

ATTACHMENT IF LOAD WILL

EXCEED FORK TRUCK MANUFACTURER'S

LOAD CENTER RATING

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.
**UNITS REQUIRING APPROVAL DRAWINGS OR
MODIFIED ARE NON-RETURNABLE**

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: CJC

DATE: 5/31/2022

REFERENCE: X

SCALE: 1:24

QUOTED LEAD TIME: X

QUOTE #
X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

47-007-065

SPECIAL FEATURES

NONE