


FORK MOUNTED RUG-RAM - CRF-120


APPROX WEIGHT: 395.15 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***


ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

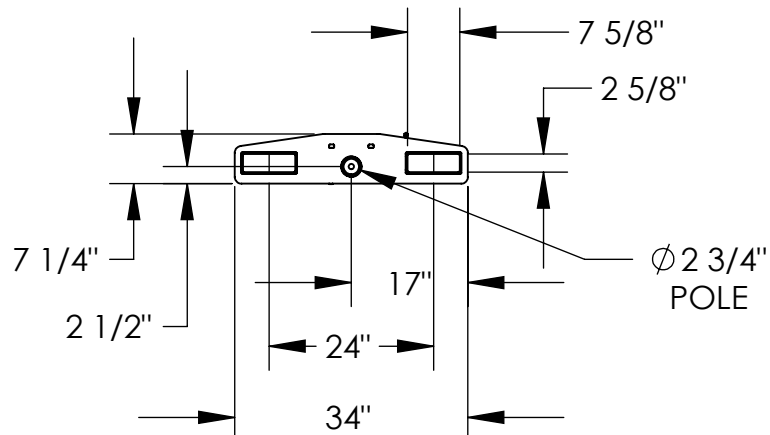

SAFETY RESTRAINT
CHAIN TO SECURE
UNIT TO FORK TRUCK

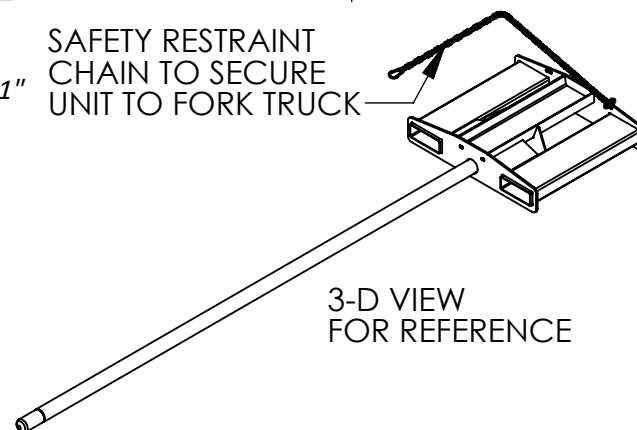

3-D VIEW
FOR REFERENCE

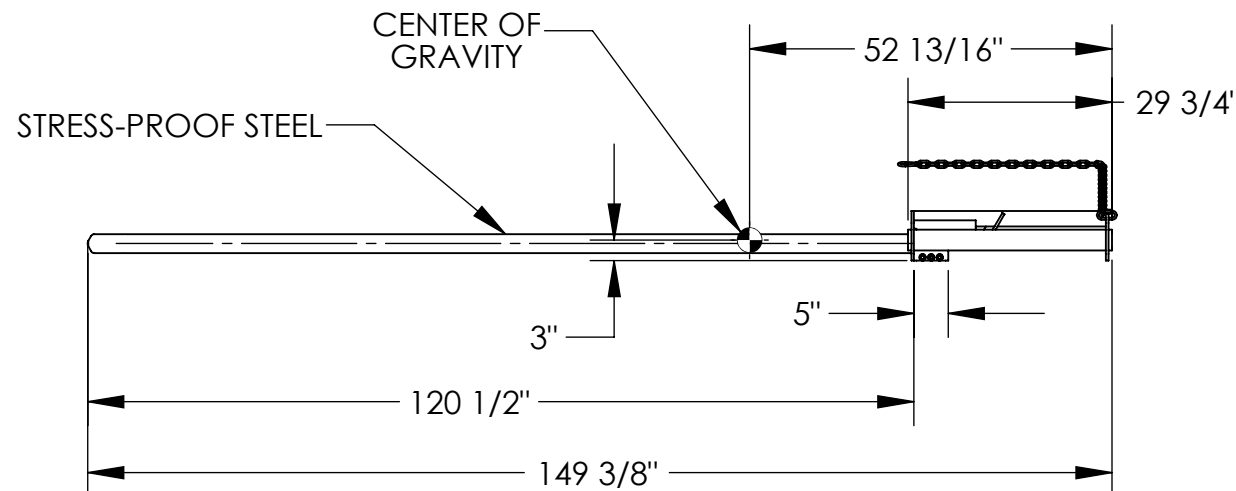

POLE DIMENSION TOLERANCE $\pm 1/2$ "

APPROX. WEIGHT / LOST LOAD = 395 LBS.
MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"
VERTICAL CENTER OF GRAVITY = 3"
HORIZONTAL CENTER OF GRAVITY = 52 13/16"

NEVER EXCEED LOAD CENTER
RATING PER FORKTRUCK
MANUFACTURERS GUIDELINES.
DO NOT USE THIS FORK TRUCK
ATTACHMENT IF LOAD WILL EXCEED
FORK TRUCK MANUFACTURER'S
LOAD CENTER RATING

STANDARD FEATURES

MODEL NUMBER: CRF-120
CAPACITY: 2,200 LBS. UNIFORM CAPACITY
POLE LENGTH: 120 1/2"
OVERALL LENGTH: 149 3/8"
POLE DIAMETER: 2 3/4"
FORK POCKETS ARE 7 5/8" W x 2 5/8" H
USABLE ON 24" FORK CENTERS
WITH SAFETY CHAIN TO SECURE TO THE
UNIT TO THE MAST OF THE FORK TRUCK
DURABLE LIQUID PAINT
BLUE FINISH ON FRAME

SPECIAL FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.
**UNITS REQUIRING APPROVAL DRAWINGS OR
MODIFIED ARE NON-RETURNABLE**
[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: BJW		W.O.#
DATE: 1/12/2008		X
REFERENCE: X	SCALE: 1:28	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		08-007-157