


PUSH EYE MANUAL TROLLEY - E-MT-8

APPROX WEIGHT: 88.37 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

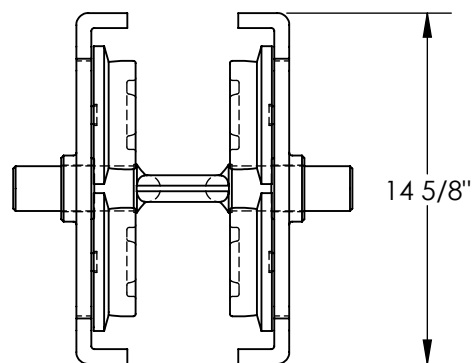

14 5/8"

3" TO 9" (I-BEAM
FLANGE WIDTH)

3/4" to 6 3/4"

Ø 5 3/4"

5 1/8"

4 1/2"

6 13/16"



2 1/2"

1 7/8"

14 1/8"

11 15/16"

5 11/16"

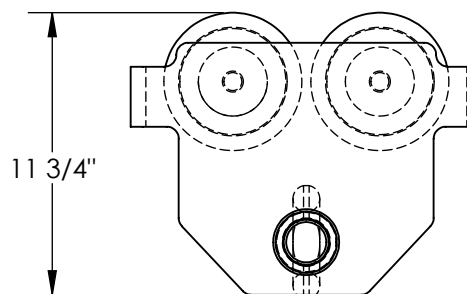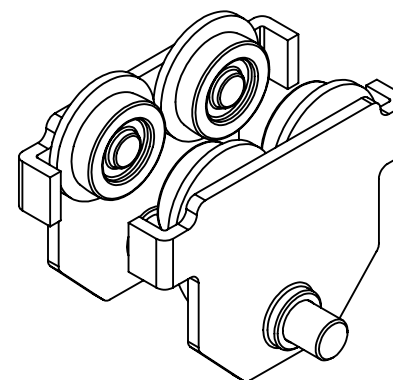

11 3/4"

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

MODEL NUMBER IS E-MT-8

LOW PROFILE PUSH EYE
MANUAL TROLLEY

OVERALL WIDTH IS: 14 1/8"

USABLE I-BEAM FLANGE WIDTH 3" TO 9"

(ADJUSTED BY ROTATING CENTER ROD)

OVERALL LENGTH IS: 14 5/8"

OVERALL HEIGHT IS: 11 15/16"

HEADROOM: 5 11/16" TO ATTACHMENT POINT

TROLLEY HEADROOM: 6 13/16"

(TO BOTTOM OF TROLLEY)

UNIFORM CAPACITY IS: 8,000 LBS.

DURABLE STEEL CONSTRUCTION

DURABLE LIQUID PAINT ORANGE FINISH

TROLLEY USABLE WIDTH ADJUSTABLE

BY ROTATING THREADED CENTER ROD

NOTE:

CAN BE USED ON S, H, W, & M
TYPE I-BEAMS

SPECIAL FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.

**UNITS REQUIRING APPROVAL DRAWINGS OR
MODIFIED ARE NON-RETURNABLE**

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: T. MOORE

DATE: 12/14/09

REFERENCE: X

SCALE: 1:8

QUOTED LEAD TIME: X

QUOTE #
X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

30-007-133