
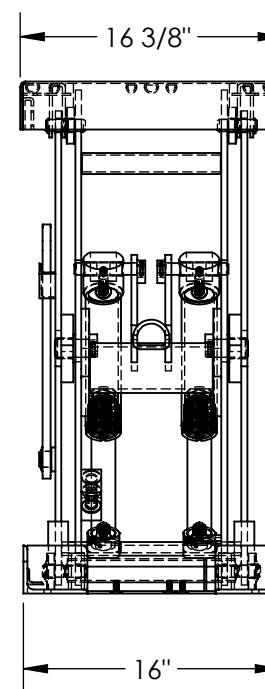


NARROW SCISSOR LIFT - EHLT-N-1648-2-32


APPROX WEIGHT: 239.57 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

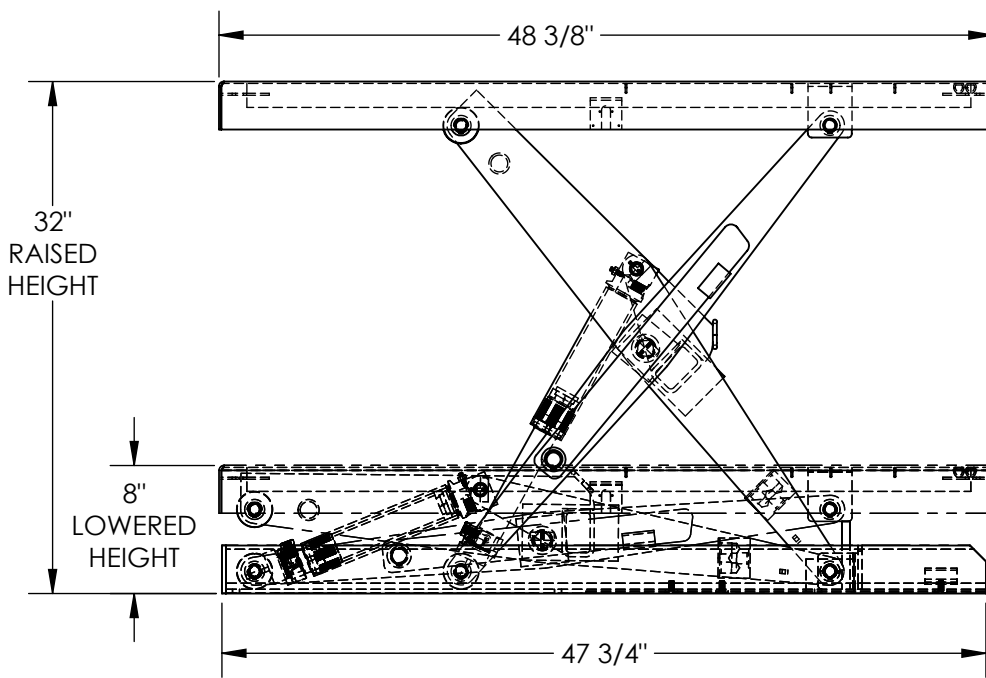

ELECTRIC TOEGUARDS
(STOP TABLE FROM
LOWERING IF BUMPED)
MEETS OSHA 1910.212

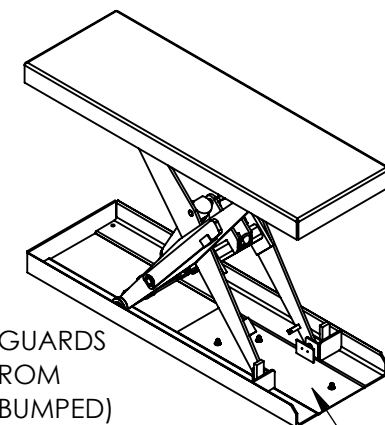

HOSE EXIT

DECK TOLERANCES $\pm 1/2$ "
TABLE HEIGHT TOLERANCES $\pm 1/2$ "
DECK FLATNESS $\pm 1/4$ "

DIMENSION TOLERANCE $\pm 1/4$ "

STANDARD FEATURES

MODEL NUMBER IS EHLT-N-1648-2-32
PLATFORM WIDTH IS 16 3/8"
PLATFORM LENGTH IS 48 3/8"
OVERALL WIDTH IS 16 3/8"
OVERALL LENGTH IS 48 3/8"
RAISED HEIGHT IS 32"
LOWERED HEIGHT IS 8"
CAPACITY (EVENLY DISTRIBUTED) IS 2,000 LBS
24V AC CONTROL VOLTAGE
SAFETY MAINTENANCE PROPS
DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN
OTHER VOLTAGES HAVE A 2' TEST LEAD
INTERNAL POWER UNIT
EMERGENCY SAFETY STOP HYDRAULIC FUSES
UPPER TRAVEL LIMIT SWITCH
ELECTRIC PINCH POINT GUARD
DURABLE LIQUID PAINTED BLUE FINISH
HANDHELD PUSH BUTTON CONTROL,
W/8ft. EXTENDED COIL CORD
AC 460 V, 3-PHASE, 60 HZ.

SPECIAL FEATURES

NONE

**460V 3 PHASE
AC POWER**

CONTACT FACTORY FOR
OTHER POWER OPTIONS

A P P R O V A L	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked		
	Signed: _____ Date: _____		
	Printed Name: _____		
	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		
	DISTRIBUTOR'S NAME: VESTIL MANUFACTURING		P.O.# X W.O.# X SALES: X FILE NAME: 24-007-561
DRAWN BY: KEC		DATE: 7/5/16	SCALE: 1:12
REFERENCE: X		QUOTE # X	
QUOTED LEAD TIME: X			