


BUMP AND DUMP 90° HOPPER - H-100-HD-BD

APPROX WEIGHT: 451 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

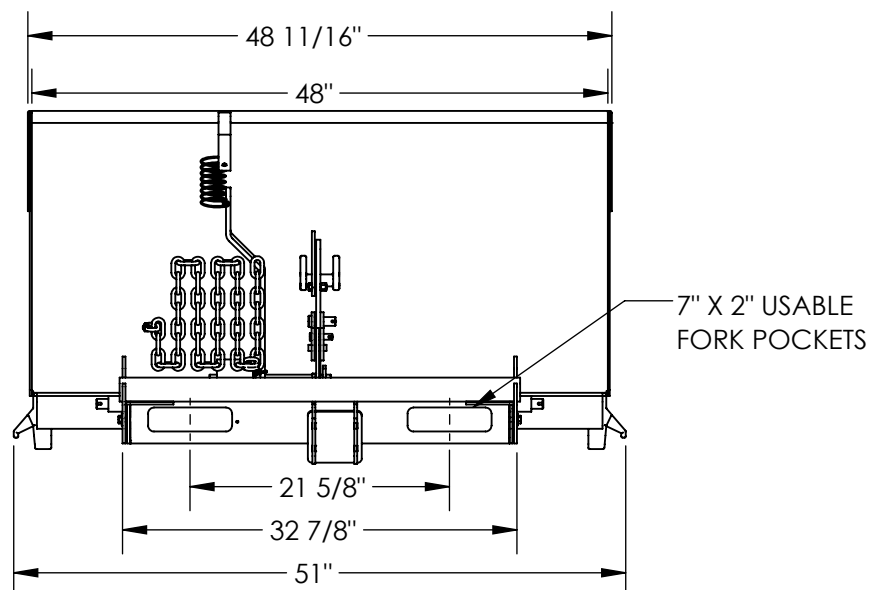

STANDARD FEATURES

MODEL NUMBER IS H-100-HD-BD

OVERALL WIDTH IS 51"

INSIDE WIDTH IS 48"

OVERALL LENGTH IS 61 3/8"

OVERALL HEIGHT IS 28 3/16"

MAX CAPACITY IS 6,000 LBS.

VOLUME IS 1 CU. YRDS.

HOPPER IS DURABLE BAKED IN POWDER

COATED BLUE FINISH

BUMP AND DUMP MECHANISM IS

DURABLE BAKED IN POWDER COATED YELLOW FINISH

APPROX. WEIGHT / LOST LOAD = 451


MINIMUM EFFECTIVE THICKNESS = FORK LENGTH - 31 1/2"

VERTICAL CENTER OF GRAVITY = 10 1/8"

HORIZONTAL CENTER OF GRAVITY = 30 3/16"

**** ADDITION OF CASTERS MAY
CHANGE WEIGHT CAPACITY
BASED ON CASTER RATING**

**SPECIAL FEATURES
NONE**

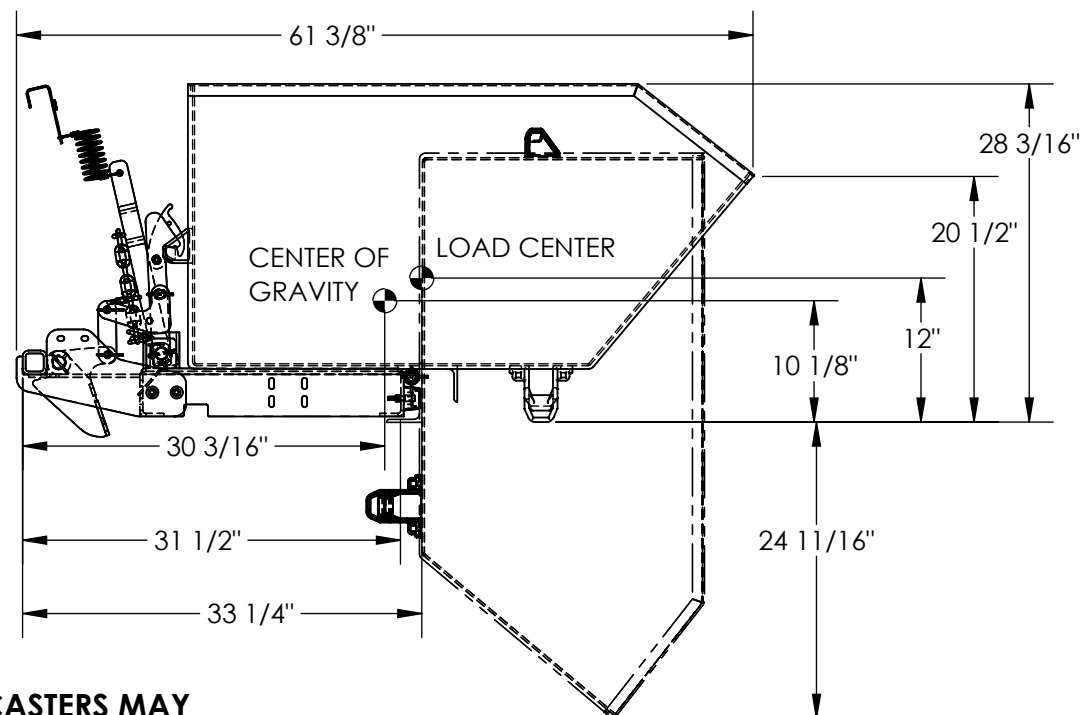

DIMENSION TOLERANCE $\pm 1/4"$

NEVER EXCEED LOAD CENTER RATING PER FORKTRUCK
MANUFACTURERS GUIDELINES.

DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED
FORK TRUCK MANUFACTURER'S LOAD CENTER RATING

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	[] As drawn [] As marked	
	Signed: _____ Date: _____	
Printed Name: _____		
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: JWW		W.O.#
DATE: 2/3/2022		X
REFERENCE: X	SCALE: 1:16	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME: 37-007-185