


HYDRAULIC BOX DUMPER - HBD-6-36

APPROX WEIGHT: 1786.02 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

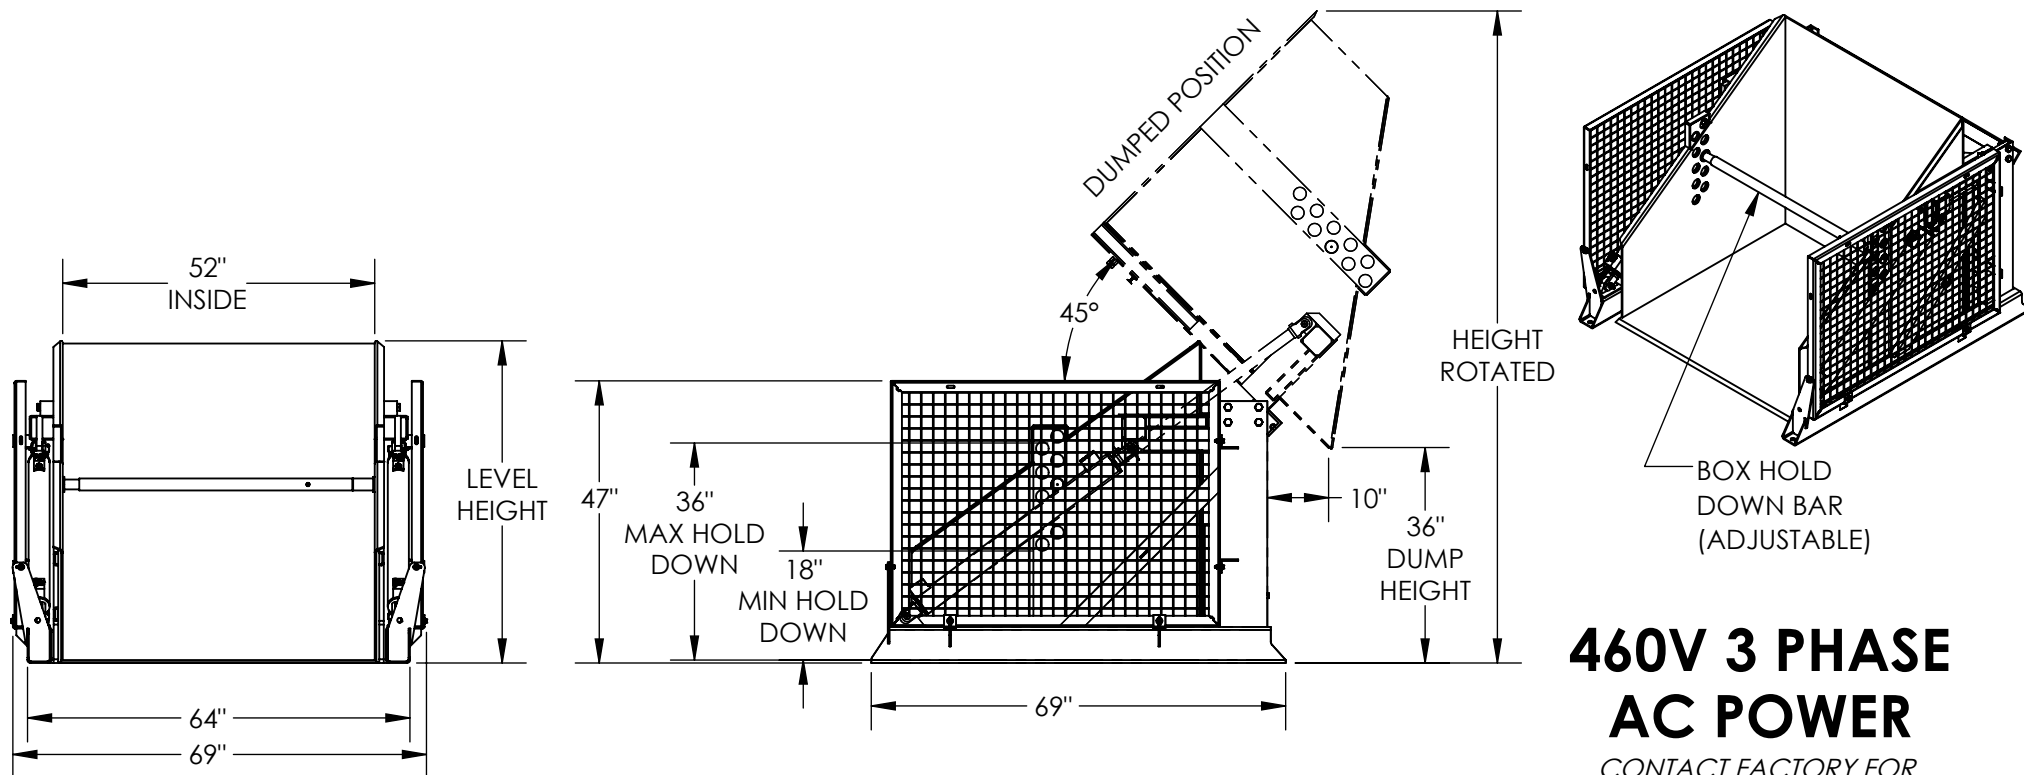

STANDARD FEATURES

HYDRAULIC BOX DUMPER MODEL IS HBD-6-36
CHUTE IS 52" W X 50" L (USABLE)
DUMPER CAPACITY IS 6000 LBS.
DUMP HEIGHT IS 36"
HOLD DOWN WILL ACCEPT BOXES 18" TO 36" HIGH W/ HOLES EVERY 2"
FRAME WIDTH IS 69"
FRAME LENGTH IS 69"
LEVEL HEIGHT IS 53 1/2"
ROTATED HEIGHT IS 111"
DUMP ANGLE IS 45°
CHROME PLATED CYLINDER WITH EMERGENCY STOP VELOCITY FUSE
WARNING: CHECK STATE AND LOCAL CODES!!
HANDHELD PUSH BUTTON CONTROL W/ 8ft EXTENDED COIL CORD
FRAME & CHUTE DURABLE LIQUID PAINT BLUE FINISH
GUARDS & HOLD DOWN BAR DURABLE BAKED IN POWDER COATED YELLOW FINISH

SPECIAL FEATURES

NONE

460V 3 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

NOTE:
SINGLE PHASE EXCEEDS 5 MIN. CYCLE TIME
460 VOLT 3 PHASE RECOMMENDED
CONTACT FACTORY FOR SINGLE PH. APPLICATIONS

A P P R O V A L	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	☐ As drawn ☐ As marked	
	Signed: _____ Date: _____	
	Printed Name: _____	
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: CA		W.O.#
DATE: 03/10/2016		X
REFERENCE: X	SCALE: 1:32	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		34-007-010

DIMENSION TOLERANCE $\pm 1/4"$