
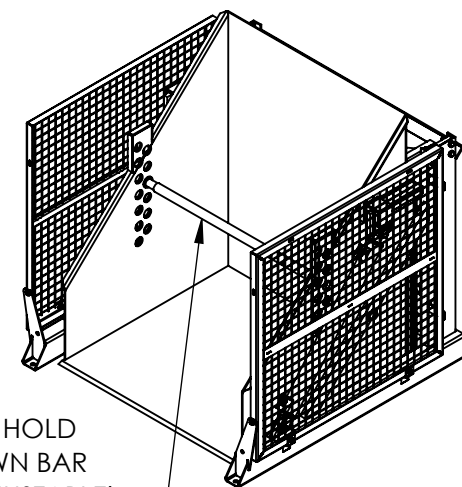


HYDRAULIC BOX DUMPER - HBD-6-48

APPROX WEIGHT: 1977.04 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

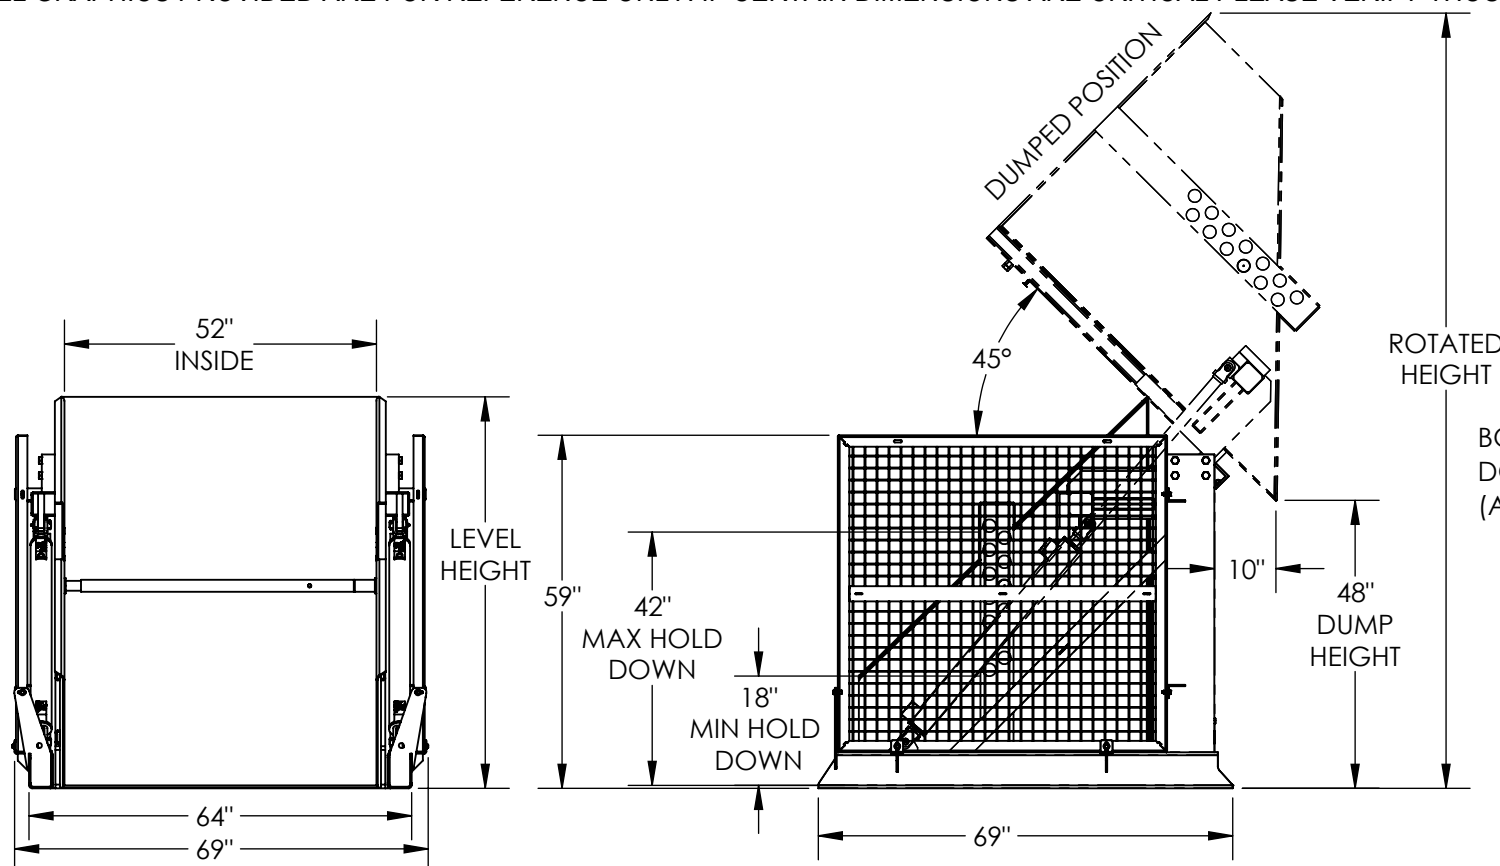

460V 3 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

NOTE:
SINGLE PHASE EXCEEDS
5 MIN. CYCLE TIME
460 VOLT 3 PHASE
RECOMMENDED
CONTACT FACTORY FOR
SINGLE PH APPLICATIONS

STANDARD FEATURES

HYDRAULIC BOX DUMPER MODEL IS HBD-6-48
CHUTE IS 52" W X 50" L (USABLE)
DUMPER CAPACITY IS 6000 LBS.
DUMP HEIGHT IS 48"
HOLD DOWN WILL ACCEPT BOXES 18" TO 42" HIGH W/ HOLES EVERY 2"
FRAME WIDTH IS 69"
FRAME LENGTH IS 69"
LEVEL HEIGHT IS 65"
ROTATED HEIGHT IS 129 1/2"
DUMP ANGLE IS 45°
CHROME PLATED CYLINDER WITH EMERGENCY STOP VELOCITY FUSE
WARNING: CHECK STATE AND LOCAL CODES!!
HANDHELD PUSH BUTTON CONTROL W/ 8ft EXTENDED COIL CORD
FRAME & CHUTE DURABLE LIQUID PAINT BLUE FINISH
GUARDS & HOLD DOWN BAR DURABLE BAKED IN POWDER COATED YELLOW FINISH

SPECIAL FEATURES

NONE

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	☐ As drawn	☐ As marked
	Signed: _____ Date: _____	
Printed Name: _____		
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
W.O.#		X
DRAWN BY: CA	DATE: 09/30/2011	SALES: X
REFERENCE: X	SCALE: 1:32	FILE NAME:
QUOTED LEAD TIME: X	QUOTE # X	34-007-011

DIMENSION TOLERANCE $\pm 1/4"$