


HYDRAULIC BOX DUMPER - HBD-6-60


*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

APPROX WEIGHT: 2087.44 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

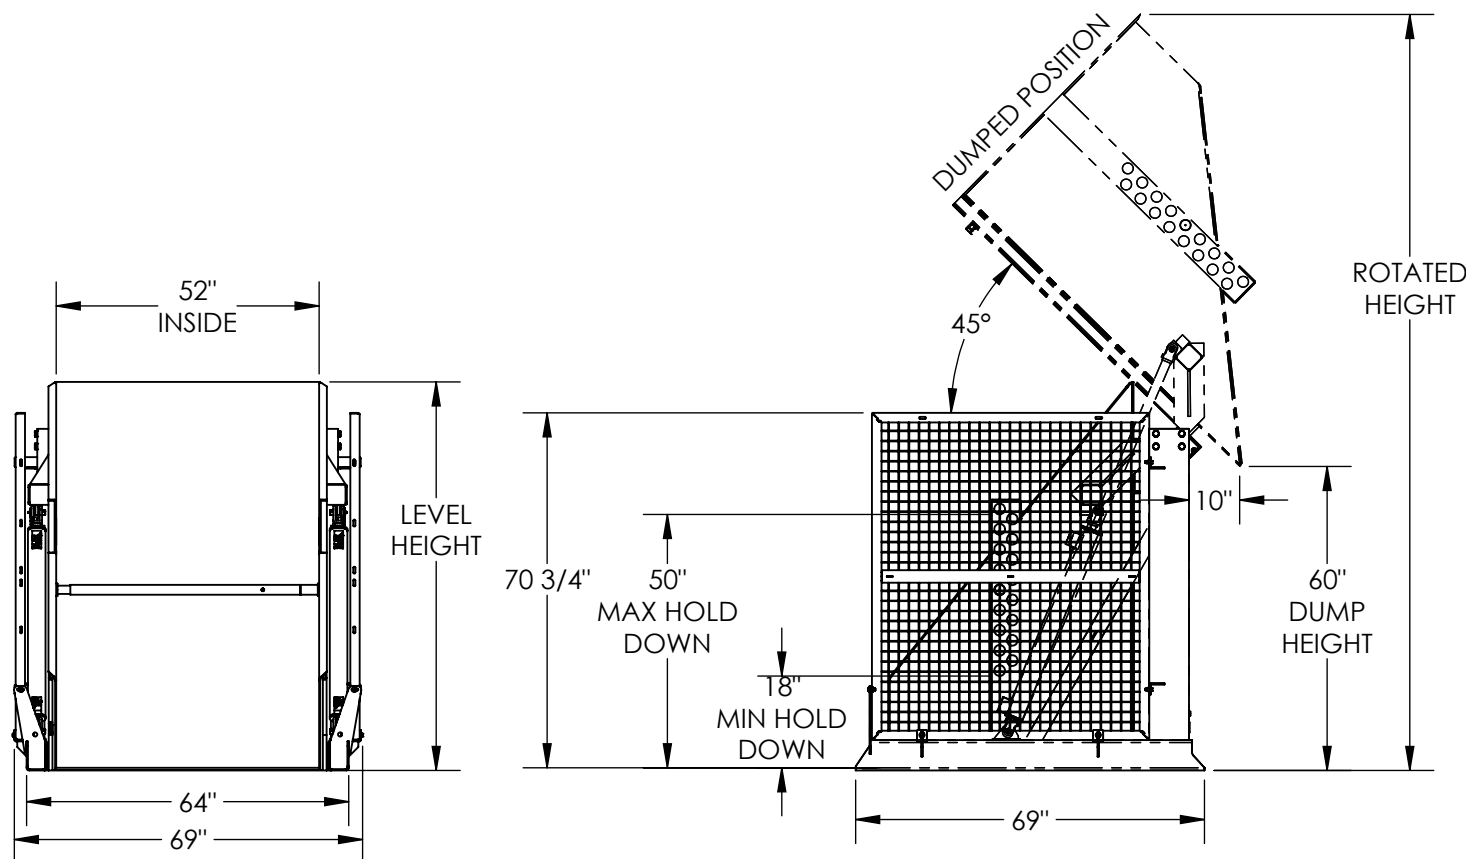

BOX HOLD DOWN BAR (ADJUSTABLE)

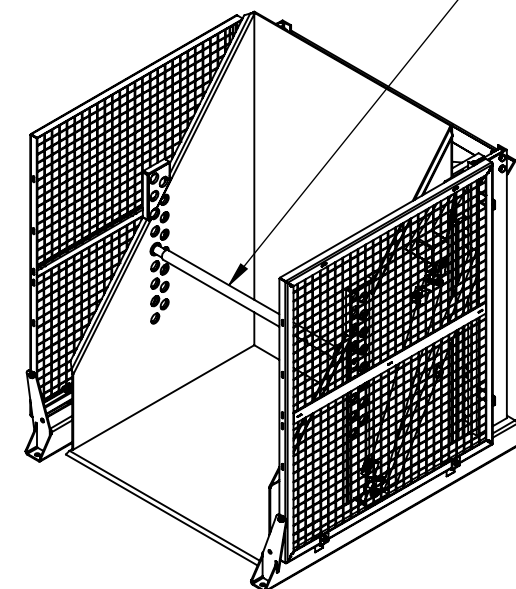

**460V 3 PHASE
AC POWER**

CONTACT FACTORY FOR
OTHER POWER OPTIONS

NOTE:

SINGLE PHASE EXCEEDS 5 MIN.
CYCLE TIME, 460 VOLT 3 PHASE RECOMMENDED,
CONTACT FACTORY FOR SINGLE PH APPLICATIONS

STANDARD FEATURES

HYDRAULIC BOX DUMPER MODEL IS HBD-6-60
CHUTE IS 52" W X 50" L (USABLE)
DUMPER CAPACITY IS 6000 LBS.
DUMP HEIGHT IS 60"
HOLD DOWN WILL ACCEPT BOXES 18" TO 50" HIGH W/ HOLES EVERY 2"
FRAME WIDTH IS 69"
FRAME LENGTH IS 69"
LEVEL HEIGHT IS 77"
ROTATED HEIGHT IS 149 1/2"
DUMP ANGLE IS 45°
CHROME PLATED CYLINDER WITH EMERGENCY STOP VELOCITY FUSE
WARNING: CHECK STATE AND LOCAL CODES!!
HANDHELD PUSH BUTTON CONTROL W/ 8ft EXTENDED COIL CORD
FRAME & CHUTE ARE DURABLE LIQUID PAINT BLUE FINISH
GUARDS & HOLD DOWN BAR ARE DURABLE BAKED IN POWDER COATED YELLOW FINISH

SPECIAL FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: CA		W.O.#
DATE: 10/26/2011		X
REFERENCE: X	SCALE: 1:38	SALES: X
QUOTED LEAD TIME: X	QUOTE #	FILE NAME:
	X	34-007-012

DIMENSION TOLERANCE $\pm 1/4"$