


MULTI-PURPOSE TOTE DUMPER-JMD-1000-60

APPROX WEIGHT: 887.37 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE

12 V DC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

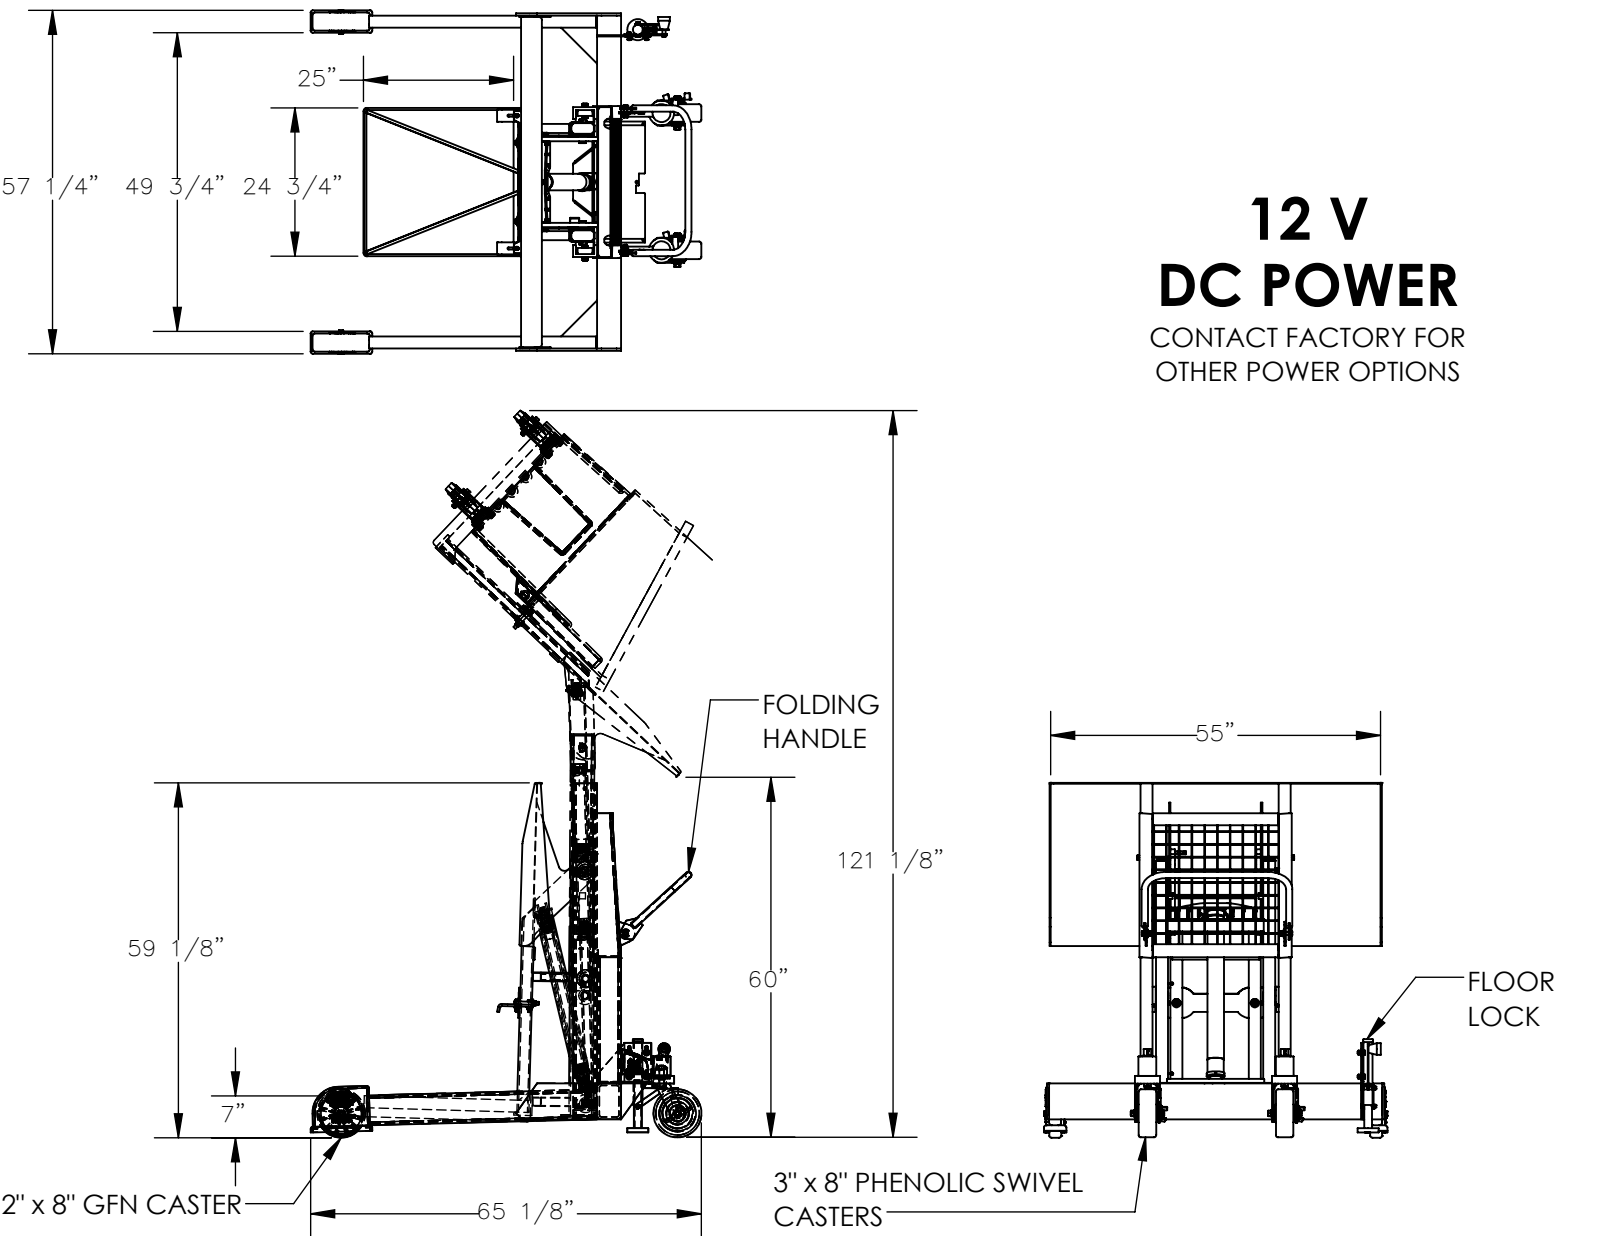

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

DIMENSION TOLERANCE $\pm 1/4"$

- STANDARD FEATURES**
 - MODEL NUMBER IS JMD-1000-60
 - MAXIMUM CAPACITY IS 600 LBS
 - *CAPACITY MAY BE DOWN RATED TO CAPACITY OF TOTE BEING USED
 - OVERALL WIDTH IS 57 1/4"
 - USABLE CHUTE WIDTH IS 55"
 - STRADDLE WIDTH(I.D.) IS 49 3/4"
 - OVERALL LENGTH IS 65 1/8"
 - DUMP HEIGHT IS 60"
 - LOWERED HEIGHT IS 7"
 - OVERALL LOWERED HEIGHT IS 59 1/8"
 - OVERALL ROTATED HEIGHT IS 121 1/8"
 - MAXIMUM ROTATION ANGLE IS 135°
 - FLOOR LOCK
 - INCLUDES ONE MPT-2 POLYETHYLENE TOTE (600 LBS CAP)
 - DURABLE LIQUID PAINT BLUE FINISH

- *ADDITIONAL TOTES**
 - ___ MPT-1 TOTE HAS A 200 LBS CAP.
 - ___ MPT-2 TOTE HAS A 600 LBS CAP.

SPECIAL FEATURES

NONE

A
P
P
R
O
V
A
L

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE
[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: WHR		W.O.#
DATE: 12/21/2011		X
REFERENCE: X	SCALE: 1:32	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		34-007-017