


APPROX WEIGHT: 448.69 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

LIFT MASTER BOOM, ORBIT TELESCOPING BOOM-LM-OBT-4-24

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

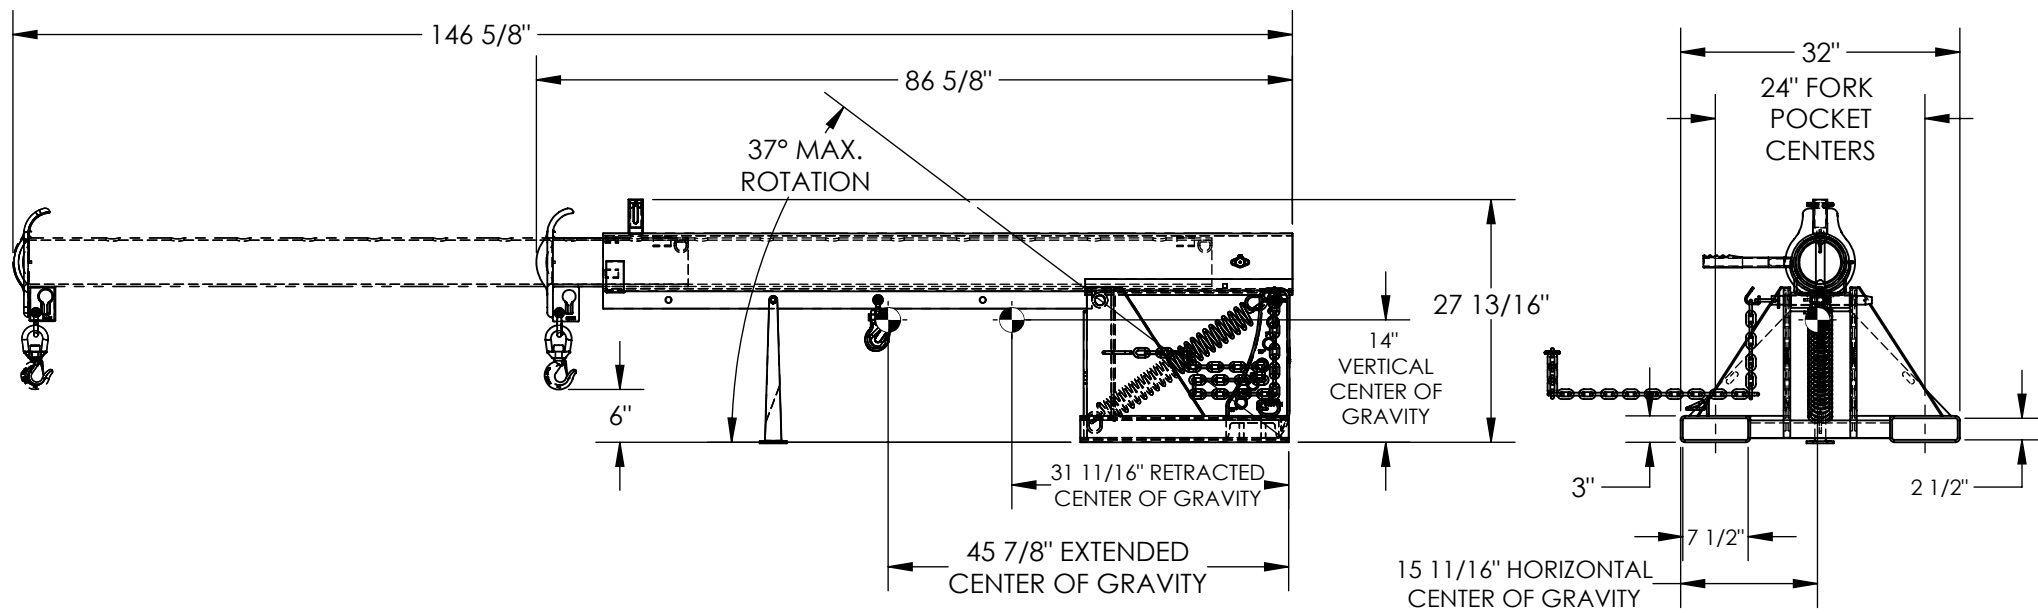

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	4000	3750	3500	3250	3000	2750	2500	2250	2000	1750

STANDARD FEATURES

MODEL NUMBER IS LM-OBT-4-24
CAPACITY IS 4,000 LBS
MAXIMUM TILT ANGLE IS 37°
OVERALL HEIGHT - 27 13/16"
HEIGHT (MAX TILTED) - 99 1/2"
LENGTH RETRACTED - 86 5/8"
LENGTH EXTENDED - 146 5/8"
OVERALL WIDTH IS 32"
36" MINIMUM HOOK POINT
144" MAXIMUM HOOK POINT
HOOK HEIGHT - 6"
HOOK HEIGHT (MAX TILTED) - 78 5/16"
USABLE FORK POCKET - 2 1/2" x 7 1/2"
24" FORK POCKET CENTERS
FRAME DURABLE BAKED IN POWDER COATED BLUE FINISH
BOOM DURABLE BAKED IN POWDER COATED YELLOW FINISH

SPECIAL FEATURES

NONE

APPROX. WEIGHT / LOST LOAD = 448.69
MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"
NEVER EXCEED LOAD CENTER
RATING PER FORKTRUCK
MANUFACTURERS GUIDELINES.
DO NOT USE THIS FORK TRUCK
ATTACHMENT IF LOAD WILL
EXCEED FORK TRUCK MANUFACTURER'S
LOAD CENTER RATING

DIMENSION TOLERANCE ± 1/4"

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE	
	☐ As drawn	☐ As marked
	Signed: _____ Date: _____	
Printed Name: _____		
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: B.NOTHNAGEL		W.O.#
DATE: 7/1/2015		X
REFERENCE: X	SCALE: 1:22	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		08-007-140