
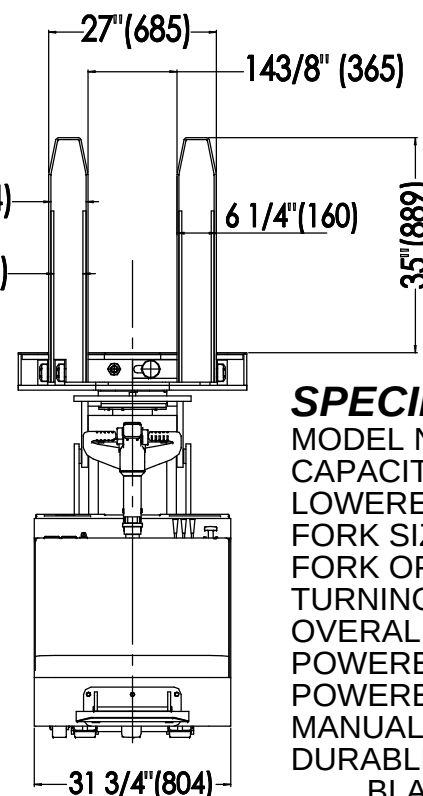


LOW PROFILE PORTABLE PALLET INVERTER - PI-P-3000-3254

APPROX WEIGHT: 1,650 LBS
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

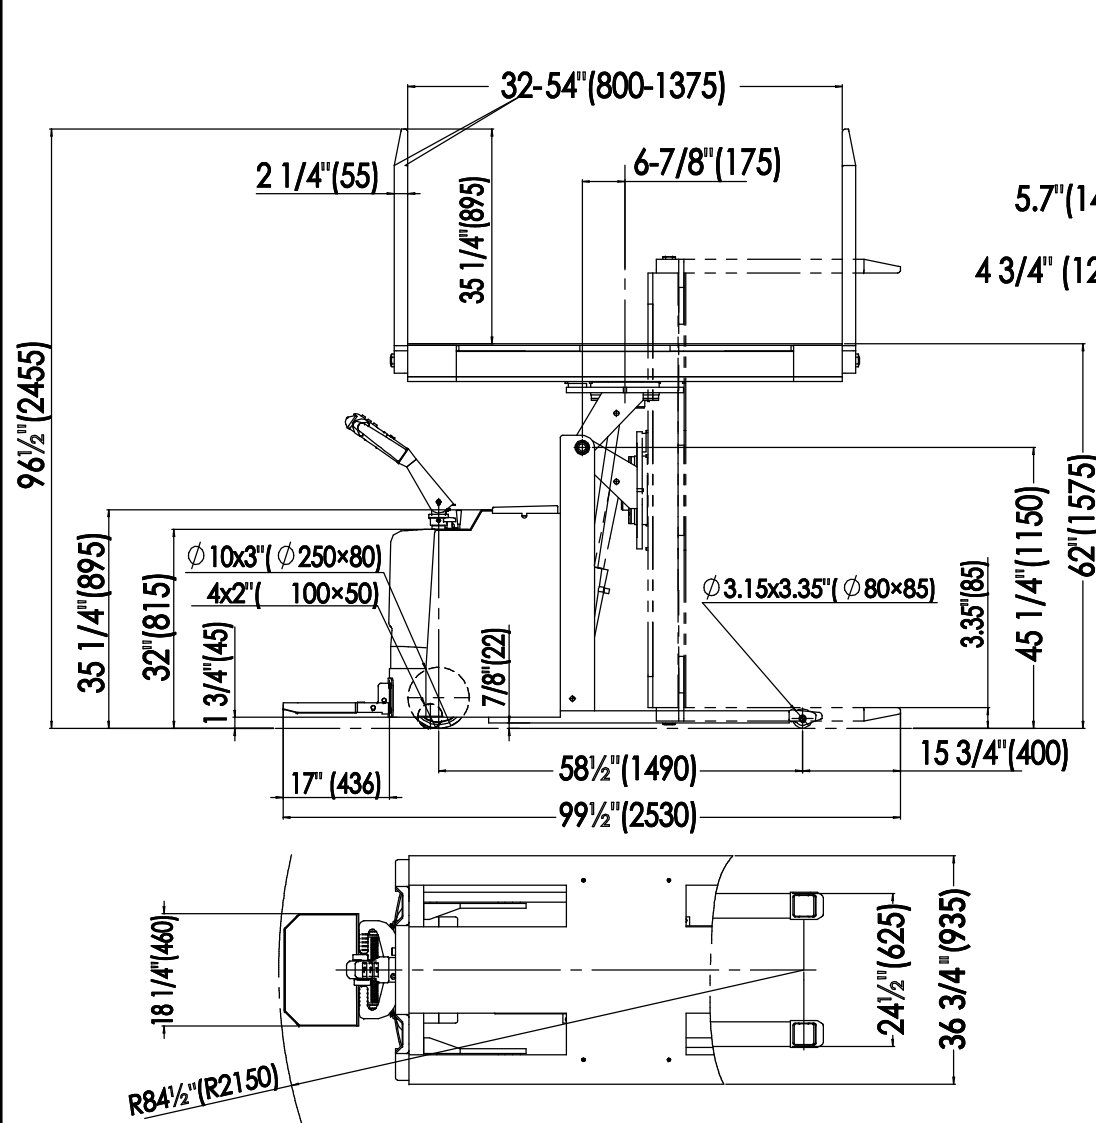

NOTE:

THIS PRODUCT WORKS WITH SKIDS,
NOT CLOSED BOTTOM PALLETS.
USE WITH US STANDARD 40" x 48"
SKIDS ONLY.

SPECIFICATIONS:

MODEL NUMBER: PI-P-3000-3254
CAPACITY: 3,000 LBS.
LOWERED HEIGHT: 3 5/8"
FORK SIZE: 27" X 35 1/4"
FORK OPENING: 32-54"
TURNING RADIUS: 84 1/2"
OVERALL SIZE: 99 1/2" X 37" X 52"
POWERED PALLET TRUCK
POWERED TILT UP / DOWN
MANUAL ROTATION
DURABLE BAKED IN POWDER COATED
BLACK & YELLOW FINISH

DIMENSION TOLERANCE $\pm 1/2"$

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.
**UNITS REQUIRING APPROVAL DRAWINGS OR
MODIFIED ARE NON-RETURNABLE**

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: TM		W.O.#
DATE: 06/10/2021		X
REFERENCE: X		SALES: X
QUOTED LEAD TIME: X		FILE NAME:
QUOTE # X		PI-P-3000-3254

TRAVEL SPEED UNLOADED: 2.8 m/h
TRAVEL SPEED LOADED: 2.1 m/h
DRIVE MOTOR: 24V/1.5 KW
LIFT MOTOR: 24V/2.0 KW
BATTERY: 4-6 VOLT / 200Ah
BATTERY CHARGER: 24V
CONTROLLER: 2207A-5102

FORK CLAMPING W/O LOAD: 9.5 SEC
FORK OPENING W/O LOAD: 10 SEC
FORK CLAMPING W/ LOAD: 14 SEC
FORK OPENING W/ LOAD: 7.5 SEC
FORK TILTING UP W/O LOAD: 15 SEC
FORK LOWERING DOWN W/O LOAD: 14 SEC
FORK TILTING UP W/ LOAD 23 SEC
FORK LOWERING DOWN W/ LOAD 13.5 SEC