


PORTABLE PALLET INVERTER W/ STRADDLE LEGS - PI-P-SL-3000-3254

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

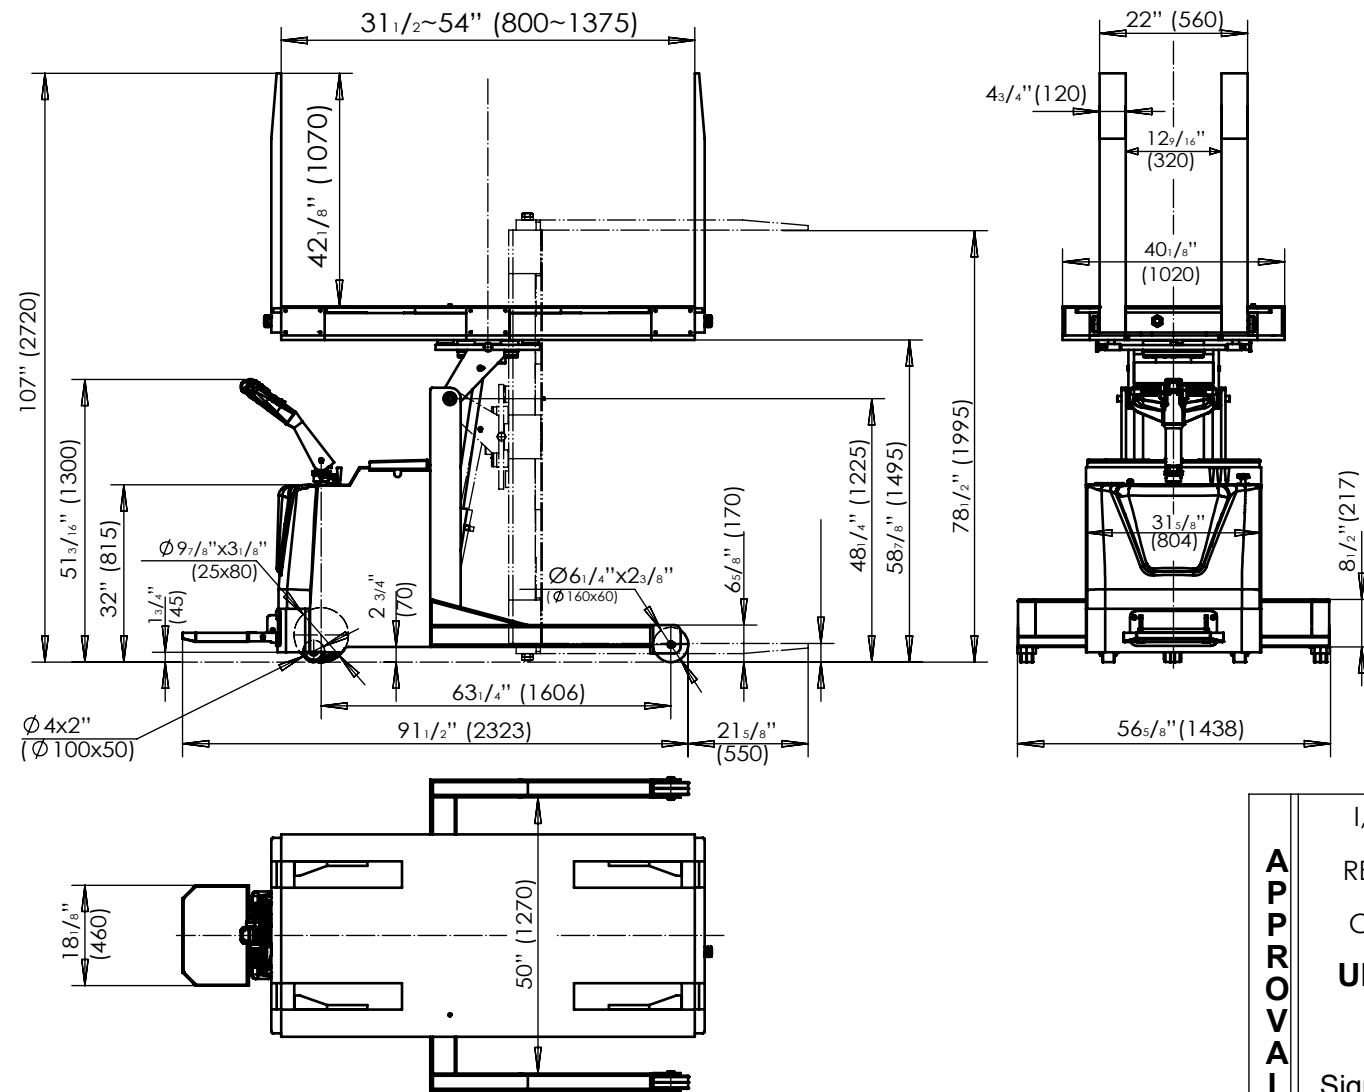

SPECIFICATIONS:

MODEL NO: PI-P-SL-3000-3254

CAPACITY: 3,000 LBS

LOWERED HEIGHT: 3 1/4"

FORKS SIZE: 22" X 42 1/8"

FORK OPENING: 32 1/2" - 54"

TURNING RADIUS: 84 1/2"

OVERALL SIZE: 113" X 56 1/2" X 82 1/2"

NET WEIGHT: 2,500 LBS

POWERED DRIVE

POWERED TILT UP / DOWN

MANUAL ROTATION

HAND CONTROL

TOUGH BAKED IN POWDER COATED
BLACK AND YELLOW FINISH

DIMENSION TOLERANCE $\pm 1/2"$

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: TM

DATE: 04/04/2022

REFERENCE: X

SCALE: NTS

QUOTED LEAD TIME: X

QUOTE # X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

PI-P-SL-3000-3254

TRAVEL SPEED UNLOADED: 2.8 m/h

TRAVEL SPEED LOADED: 1.8 m/h

DRIVE MOTOR: 24V / 1.2KW

LIFT MOTOR: 24V 2.0KW

BATTERY: 4 - 6V / 200Ah

BATTERY CHARGER: 24V

CONTROLLER: 2207 A-5102

FORK CLAMPING W/O LOAD: 9.5 SEC

FORK OPENING W/O LOAD: 10 SEC

FORK CLAMPING W/ LOAD: 14 SEC

FORK OPENING W/ LOAD: 7.5 SEC

FORK TILTING UP W/O LOAD: 15 SEC

FORK LOWERING DOWN W/O LOAD: 14 SEC

FORK TILTING UP W/ LOAD: 23 SEC

FORK LOWERING DOWN W/ LOAD: 13.5 SEC