

ELECTRIC HYDRAULIC TRASH CAN DUMPER - TCD-M-48-AC


APPROX WEIGHT: 550.93 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

115V 1 PHASE AC POWER

CONTACT FACTORY FOR
OTHER POWER OPTIONS

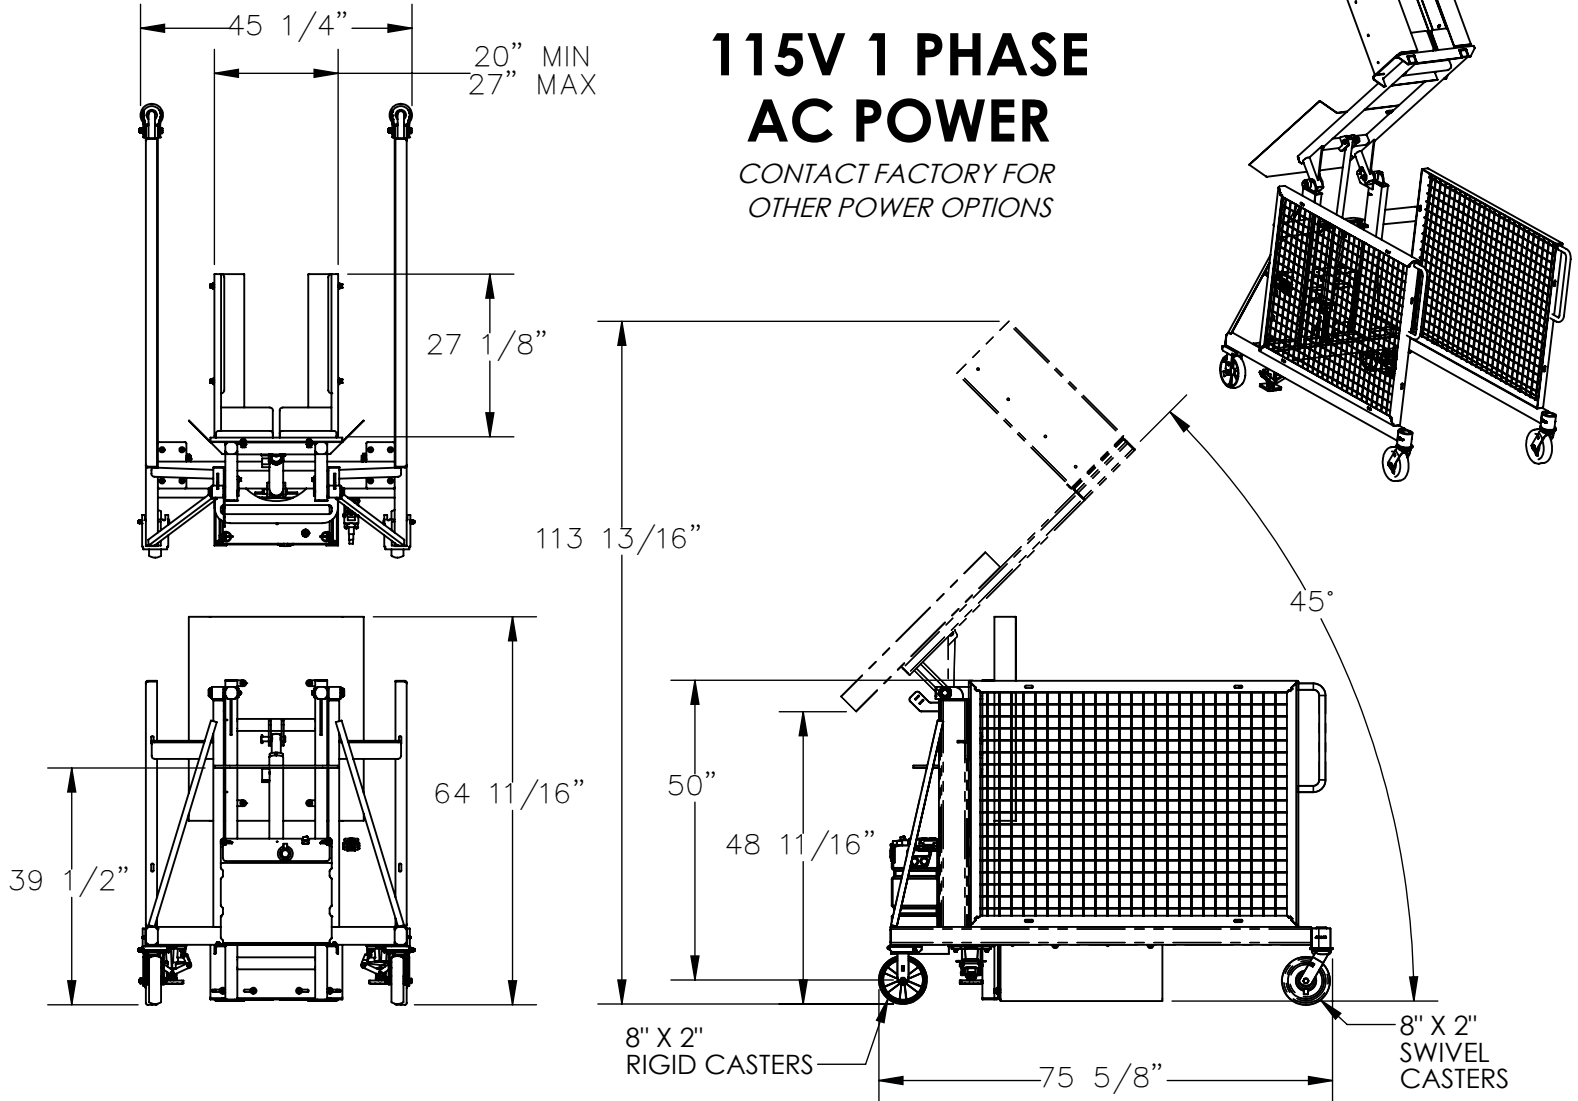

STANDARD FEATURES

MODEL NUMBER: TCD-M-48-AC
USABLE CHUTE WIDTH: 20" MIN TO 27" MAX
USAGE CHUTE LENGTH: 27 1/8"
OVERALL LENGTH: 75 5/8"
OVERALL WIDTH: 45 1/4"
OVERALL HEIGHT: 64 11/16"
OVERALL ROTATED HEIGHT: 50"
MAXIMUM ROTATED ANGLE: 45°
DUMP HEIGHT: 48 11/16"
WORKS WITH MODEL# TH-32/64/95
UNIFORM CAPACITY IS 400 LBS
CASTERS:
FRONT: 8" X 2" PHENOLIC SWIVEL
REAR: 8" X 2" GFN RIGID
TWO ADJUSTABLE FLOOR LOCKS
INTERNAL POWER UNIT: 115 V AC SINGLE PHASE
HANDHELD PUSH BUTTON CONTROL,
W/8ft. EXTENDED COIL CORD

FRAME: DURABLE LIQUID PAINT BLUE FINISH
CHUTE: DURABLE BAKED IN POWDER COATED
YELLOW FINISH

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE $\pm 1/4"$

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

P.O.# X

W.O.# X

DRAWN BY: SJA

DATE: 7/28/2016

SALES: X

REFERENCE: X

SCALE: 1:32

FILE NAME:

QUOTED LEAD TIME: X

QUOTE # X

34-007-015-001