



APPROX WEIGHT: 253.41 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

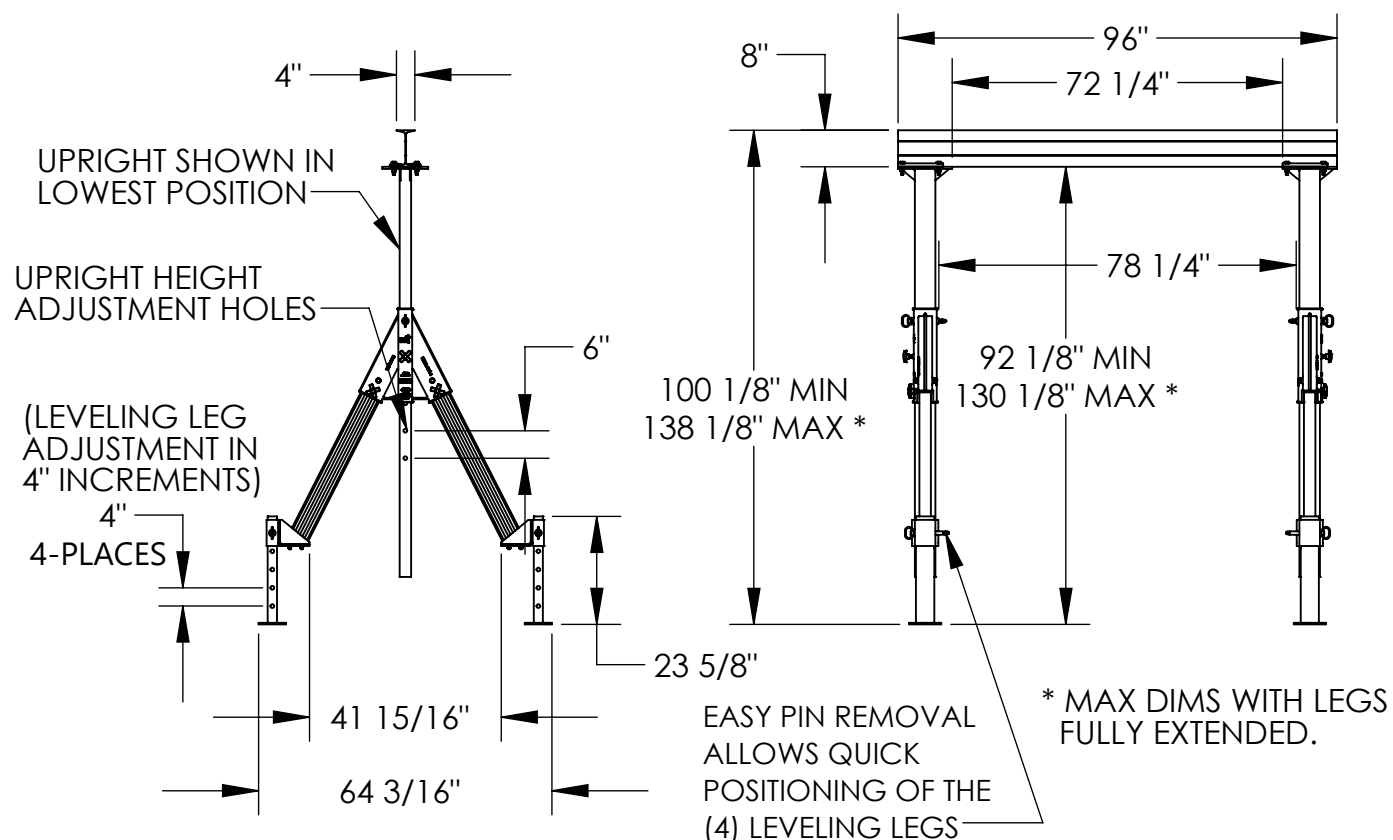

3D VIEW
FOR REFERENCE

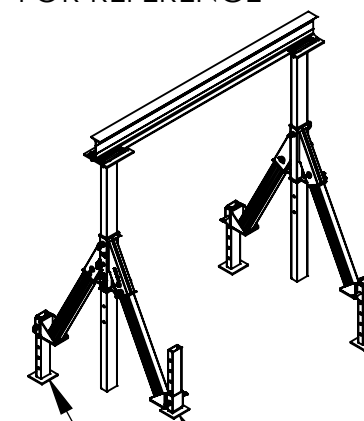

LEVELING LEG
SHOWN FULLY
EXTENDED—

—LEVELING LEG
SHOWN FULLY
RETRACTED

SPECIAL FEATURES

MODEL NUMBER IS AHA-4-8-10-ALO
CAPACITY IS 4,000 LBS.

BASF WIDTH IS 64 3/16"

MAX OVERALL HEIGHT IS 138 1/8" *

I-BEAM SIZE IS 8" TALL WITH

4" FLANGE WIDTH

OVERALL I-BEAM LENGTH IS 96"

OVERALL I-BEAM LENGTH IS 70
USABLE I-BEAM LENGTH IS 72 1/4"

LEVELING LEG HEIGHT IS INDIVIDUALLY ADJUSTED

UP TO 16" MAX. TO LEVEL CRANE

UNDER I-BEAM HEIGHT MAY BE ADJUSTED IN 6"

ORDER 1 BEAM HEIGHT MAY BE ADJUSTED IN 6 INCREMENTS USING THE 6 HOLES IN THE UPRIGHTS

ADJUSTABLE UNDER I-BEAM HEIGHT

92 1/8" MIN.

130 1/8" MAX. *

CRANE MAY BE TAKEN APART AND BUNDLED WITH

(2) INCLUDED STRAPS FOR EASY TRANSPORT

ALUMINUM CONSTRUCTION

NONE

* MAX DIMS WITH LEGS FULLY EXTENDED.

DIMENSION TOLERANCE $\pm 1/4"$

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

APPENDIX

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

P.O.#	X
-------	---

W.O.#	x
-------	---

DRAWN BY: MTS

DATE:	10/11/2019
-------	------------

	SALES:	X
--	--------	---

REFERENCE: X

SCALE: 1:42

FILE NAME:	
------------	--

QUOTED LEAD TIME: X

QUOTE #	X
---------	---

28-007-430
