


BUMP AND DUMP 90° HOPPER - H-100-LD-BD

APPROX WEIGHT: 352 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

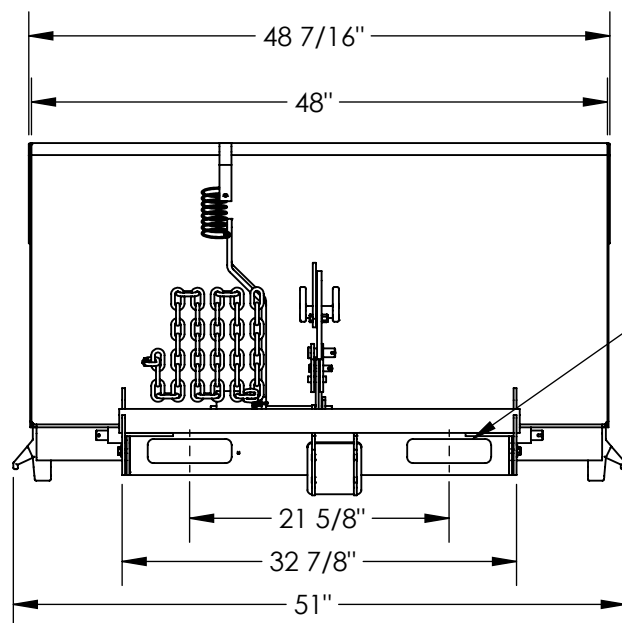

STANDARD FEATURES

MODEL NUMBER IS H-100-LD-BD

OVERALL WIDTH IS 51"

INSIDE WIDTH IS 48"

OVERALL LENGTH IS 61 3/8"

OVERALL HEIGHT IS 28 1/8"

MAX CAPACITY IS 2,000 LBS.

VOLUME IS 1 CU. YRDS.

HOPPER IS DURABLE BAKED IN POWDER

COATED BLUE FINISH

BUMP AND DUMP MECHANISM IS

DURABLE BAKED IN POWDER COATED YELLOW FINISH

APPROX. WEIGHT / LOST LOAD = 352

MINIMUM EFFECTIVE THICKNESS = FORK LENGTH - 31 1/2"

VERTICAL CENTER OF GRAVITY = 9 3/16"

HORIZONTAL CENTER OF GRAVITY = 29 1/4"


NEVER EXCEED LOAD CENTER RATING PER FORKTRUCK

MANUFACTURERS GUIDELINES.

DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED

FORK TRUCK MANUFACTURER'S LOAD CENTER RATING

7" X 2" USABLE
FORK POCKETS

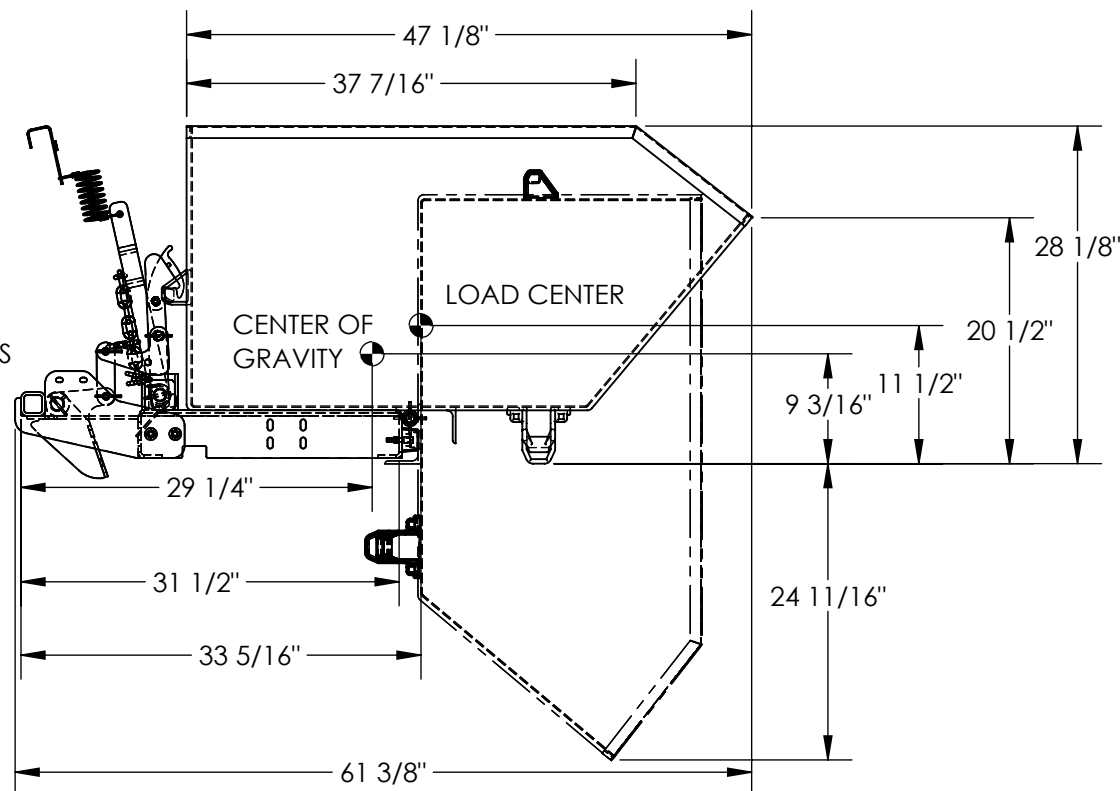

DIMENSION TOLERANCE $\pm 1/4"$

**** ADDITION OF CASTERS MAY
CHANGE WEIGHT CAPACITY
BASED ON CASTER RATING**

SPECIAL FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: JWW

DATE: 2/3/2022

REFERENCE: X

SCALE: 1:16

QUOTED LEAD TIME: X

QUOTE # X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

37-007-183